


1 2 3 4

A

B

WALL ANCHORS CAN VARY SUBJECT TO SUBSTRATE COMPOSITION (TYP.) (FOR PLUMBING AND ALIGNING OF VERTICAL RAILS, SHIMS AS REQUIRED)

C

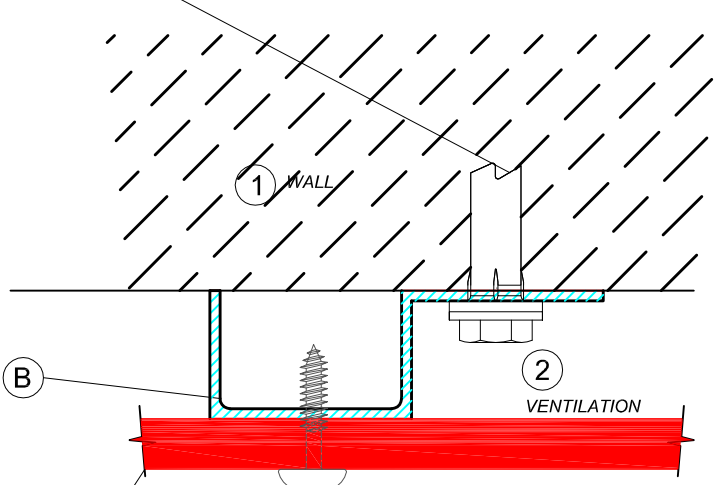

LINE OF BUILDING SUBSTRATE
1"
PANEL THICKNESS 8 & 10mm

D

MAX EXTERIOR CLADDING (A)

COLOR MATCHED SCREWS FOLLOW MANUFACTURER'S RECOMMENDATIONS FOR FIXED/SLIDING POINTS AND FASTENER SPACING REQUIRED (TYP.)

E

F

A	MAX Exterior panel
B	h/J profile
1	wall
2	rear ventilation
Zust	Änderung Datum Name (Urspr.)

Intermediate support detail A108
MAX Exterior screwed
(Ers. f.):
(Ers. d.): 2015/10